

## **ELETTROMAGNETI DI SERIE** *STANDARD ELECTROMAGNETS*

**SERVIZIO INTERMITTENTE**  
*INTERMITTENT OPERATION*



K3i



K6i




K12i



K30i

Modelli e dimensioni per servizio intermittente - Models and size for intermittent operation

| Modello<br>Type | Volt | Service<br>Current | Dimensioni in mm. - Size of mm. |      |     |       |    |    |     |     |           |      |
|-----------------|------|--------------------|---------------------------------|------|-----|-------|----|----|-----|-----|-----------|------|
|                 |      |                    | Ai                              | B    | H   | C max | D  | E  | F   | G   | I         | L    |
| K3i/12          | 12   | 23                 | 70                              | Ø45  | 70  | 35    | 35 | 52 | 48  | 65  | M6<br>X20 | Ø6,5 |
| K3i/24          | 24   | 8,5                |                                 |      |     |       |    |    |     |     |           |      |
| K6i/12          | 12   | 23                 | 87                              | Ø60  | 82  | 45    | 50 | 70 | 65  | 85  | M6<br>X20 | Ø8,5 |
| K6i/24          | 24   | 9                  |                                 |      |     |       |    |    |     |     |           |      |
| K12i/12         | 12   | 19                 | 96                              | Ø76  | 105 | 50    | 65 | 85 | 80  | 100 | M6<br>X25 | Ø8,5 |
| K12i/24         | 24   | 9                  |                                 |      |     |       |    |    |     |     |           |      |
| K30i/12         | 12   | 21,5               | 105                             | Ø102 | 100 | 50    | 75 | 95 | 105 | 120 | M8<br>X30 | Ø8,5 |
| K30i/24         | 24   | 12,5               |                                 |      |     |       |    |    |     |     |           |      |

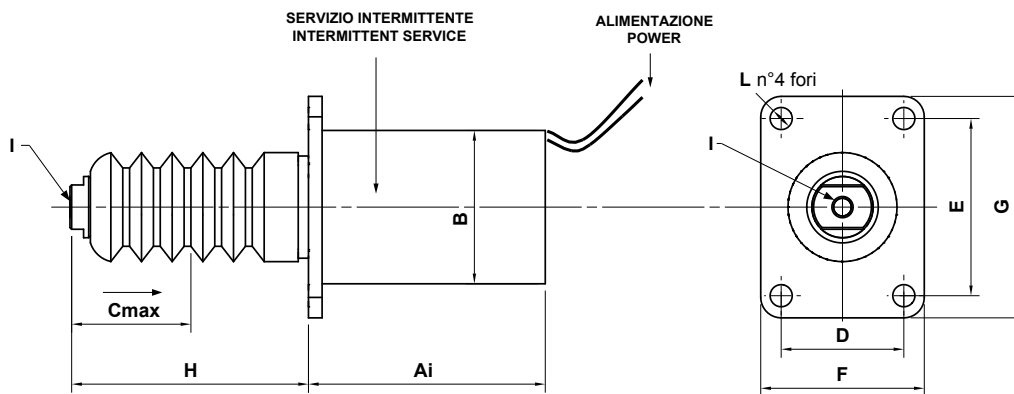

**FORZA PER SERVIZIO INTERMITTENTE**  
FORCE FOR INTERMITTENT OPERATION

